



Data sheet - ACP 28, G version

ACP 28, G version, single-phase,
purge port R 1/4"

Data sheet - ACP 28, G version


ACP 28, G version, single-phase, purge port R 1/4"

ACP 28, G version



[Similar Image](#)

Dimensions

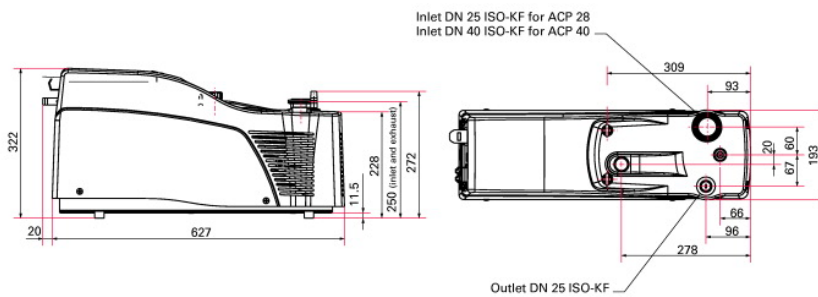

ACP 28, G version, single-phase, purge port R 1/4"

Technical Data	ACP 28, G version, single-phase, purge port R 1/4"
Ambient temperature	12 to 40 °C
Continuous inlet pressure, max.	1013 hPa
Cooling	Air
Corrosive gas version	Yes (light duty)
Dimensions (L x W x H)	647 x 193 x 322 mm
Flange (in)	DN 25 ISO-KF
Flange (out)	DN 25 ISO-KF
Helium leak rate, max.	$5 \cdot 10^{-8}$ Pa m ³ /s
Mains requirement: voltage	100-230 V \pm 10 %, 50/60 Hz
N ₂ purge flow, min.	3.7 Slm
Power consumption at ultimate pressure	700 W
Processes	Light Duty Applications
Pumping speed, max.	27 m ³ /h
Typical ultimate pressure	0.03 hPa
Typical ultimate pressure with N ₂ purge	0.1 hPa
Version	Corrosive gas version
Weight	30 kg

Order number	V6GATSFEBF
---------------------	-------------------

Accessories	
External silencer ES 25 S, DN 25	109873
Inlet particle filter IPF 25, DN 25	111649
NRC 28/40, for ACP 28 and ACP 40 pumps	112637
Sound enclosure kit SEK 28/40, for ACP 28 and ACP 40 pumps	114379

**Vacuum solutions
from a single source**

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

**Complete range
of products**

From a single component to complex systems:
We are the only supplier of vacuum technology
that provides a complete product portfolio.

**Competence in
theory and practice**

Benefit from our know-how and our portfolio of training
opportunities! We support you with your plant layout
and provide first-class on-site service worldwide.

**Are you looking for a
perfect vacuum solution?
Please contact us:**

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de
www.pfeiffer-vacuum.com