



drying ovens
series 631 y 632 PLUS
NAHITA

Nahita drying ovens are used in research laboratories, hospitals and industry for sample drying and disinfecting materials, and other applications.

Made of painted steel and kiln-dried, have a stainless steel interior for an easy clean and a door with double glazed window that lets you control the evolution of the samples at any times. They have digital regulation of temperature and time so that allow a precise control of these processes.

features and design of the equipment

Modern and functional design destined to extract the maximum output to your equipment:

- Exterior metal furniture cover with epoxy and interior of stainless steel, highly resistant to acids and corrosives, very easy to clean.
- Door with double glazed window for external control, no temperature variations.
- Supplied with trays (2 units, height adjustable), which provides great flexibility of use allowing to introduce bottles and containers of different sizes.






drying ovens
series 631 and 632
PLUS:
back of the
equipment



technical specifications

- Air circulation system by natural convection (631 Serie plus) or forced air (632 serie plus).
- Control panel with keyboard and digital display.
- Adjustable legs for easy installation.
- Protection system overheat with visual and audible alarm.

drying ovens series 631 and 632 PLUS: front panel

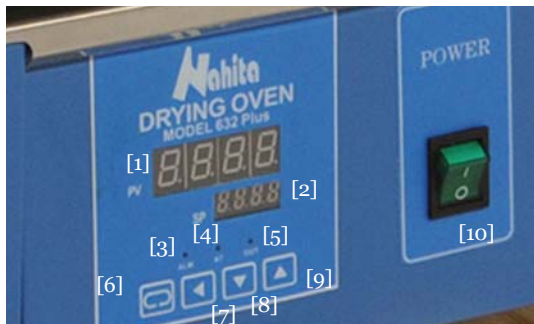

- [01] Temperature display
- [02] Display user-selected temperature
- [03] Alarm light LED
- [04] Light AutoFit LED
- [05] Operating light LED
- [06] Set -up button LED
- [07] Cursor button
- [08][09] Time and Temperature button
- [10] Switch ON / OFF

table technical specifications

Code	50631031	50631041	50631061	50631131
Model	631/3 Plus	631/45 Plus	631/65 Plus	631/125 Plus
Code	50632031	50632041	50632061	50632131
Model	632/3 Plus	632/45 Plus	632/65 Plus	632/125 Plus
Capacity	30 L	45 L	65 L	125 L
Temperature Max	RT+5-250 °C			
Resolution	0.1 °C			
Temperature fluctuation	± 1.0 °C			
Homogeneity 631 Plus Serie	3%			
Homogeneity 632 Plus Serie	2%			
Power	300 W	300 W	400 W	400 W
Dimensions (cm)				
Exterior	46x51x69	50x55x73	55x55x84	64x68x91
Interior	31x31x31	35x35x35	40x36x45	50x45x55
Weight	39 Kg	42 Kg	53 Kg	58 Kg
Fuse	15 A			
Power supply	220 V, 50 Hz ± 10%			



AUXILAB, S.L.
Polígono Morea Norte Calle D Nº 6
C.P.: 31191 [Berriain] Navarra
T: +34 948 310 513
www.auxilab.es